





FIXING & SUPPORT DETAILS

A 1.4 kN or equivalent **B** 2.8 kN or equivalent

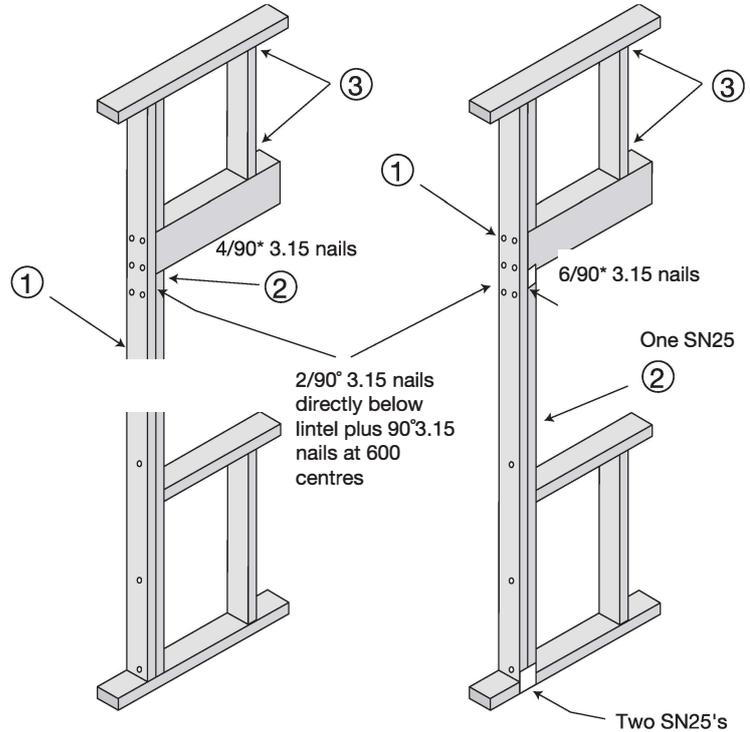

C 8.0 kN or equivalent **D** 14 kN or equivalent

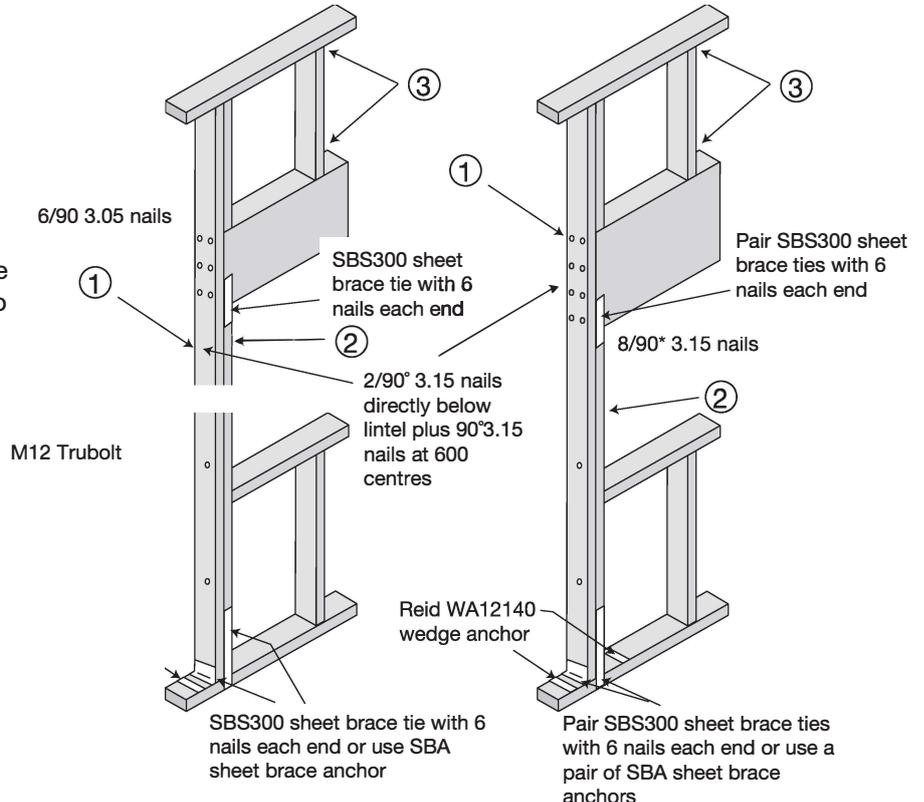

1. For trimming stud thickness refer to Table 8.5 NZS 3604:2011. Additional studs to that shown to have a minimum stud to stud fixing of 11/90° 3.15 diam. nails
2. Refer to Pryda Wallplate to Stud Joint Fixing Guide
3. Where a doubling stud which provides support for a lintel is shorter by 400mm or more than the full stud height, its thickness shall not be included as contributing to the thickness of trimming studs.
4. Bottom plate fixings as shown also applies to Pryda Lintel - the top plate fixing does not apply.