

**PL8 PL12 POSTS**  
88x88  
112x112

**POST BRACKETS**  
Bowmac B75 and BS75  
Pryda SBK3  
Plate on centre of post with 2/M12 bolts  
Maximum bearing capacity 13kN  
Maximum uplift capacity 15kN

50

80 min

25

Concrete footing

150 min for H3.2 posts

Ground level

**PL8 PL12 POSTS**  
112x112  
135x135  
180x180

**POST BRACKETS**  
Bowmac B79 and BS79  
Pryda SBK3  
Plate on centre of post with 2/M12 bolts  
Maximum bearing capacity 16kN  
Maximum uplift capacity 18kN

75



80 min

25

Concrete footing

150 min for H3.2 posts

Ground level

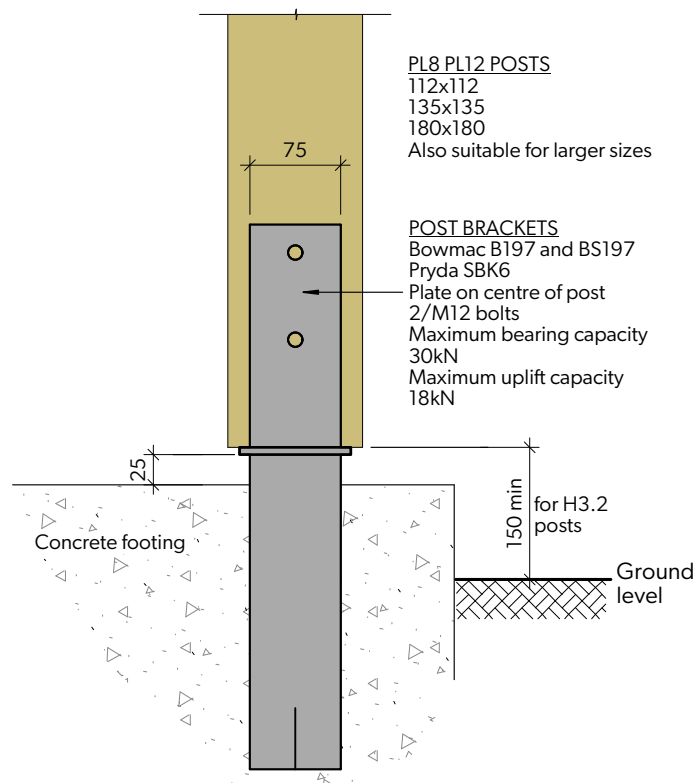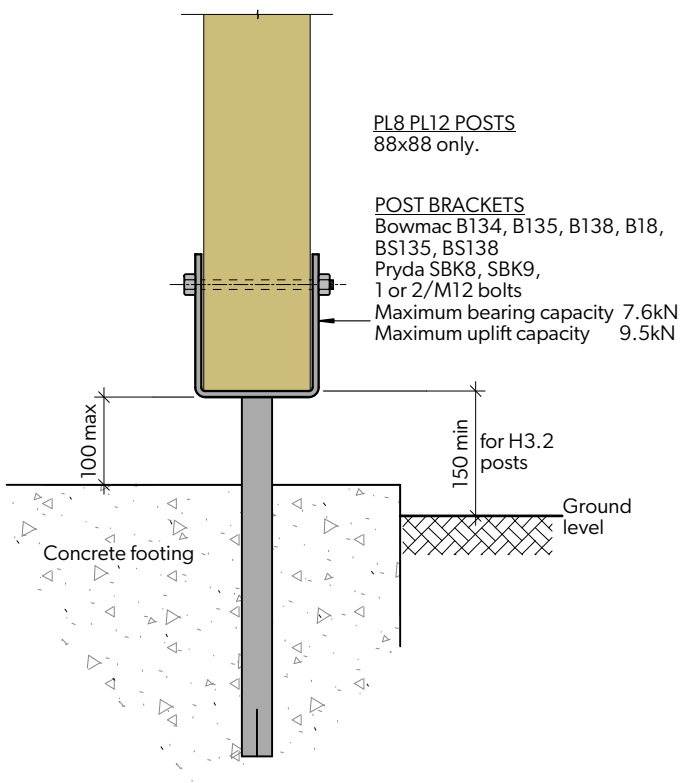

APPROVED: **DB**